


AD 700

Doosan
Mecc Alte
D+ &



ISO8528

GC ;) &

SZUTEST

GC - \$\$\$%

CE

2000/14/EC

&\$\$\$#(#

z) \$ z' z' D:

	"	"	"	"	Amp
400/230	700,00	560,00	636,00	509,00	918,00

fP GDE

GC ;) &

) & z

fDF DE

%\$!

% %&

GC " \$(**

z&(

GC

Standard Specifications

z

fl

E

z

z

ALTERNATOR

D; A Z' 5J F

TRANSFER SWITCH

AD 700

Doosan
Mecc Alte
D+' &'

Manufacturer	Doosan		
Model	P222LE-S		
		% \$\$\$ "# "	
		*\$' \$\$\$' "	
		Q\$, \$\$\$<DQ	
	L	21,930	
	"	128 x 142	
		14,6:1	
	fl # ı	"# "	1500
	fl ı	L	40,00
		L	113,00
AbsorbedAirDischargeReSourceKey.Text	' # "	32,00	
	' # "	675,00	
fl ' # ı	' # "	94,00	
	° C	598,00	
		24 V d.c.	
	Load	%\$\$ı	'+)ı
	# ")\$ı	
		130,00	99,80
			68,30


	Mecc Alte		
	ECO 40-2L/4		
	Hz	50	
	"	680,00	
7cg'		0,80	
		3	
	ıfl ı	400/230	
	A	981,00	
Temperature		H	

		ıfl ı		ıfl ı	
	"	"	"	"	L
AD 700	4120,00	3621,00	1550,00	2157,00	1000,00
		ıfl ı		ıfl ı	
	"	"	"	"	L
MS 85	5670	5297	1606	2656	1000

AD 700

Doosan
Mecc Alte
D+' &'

1 D+' &'

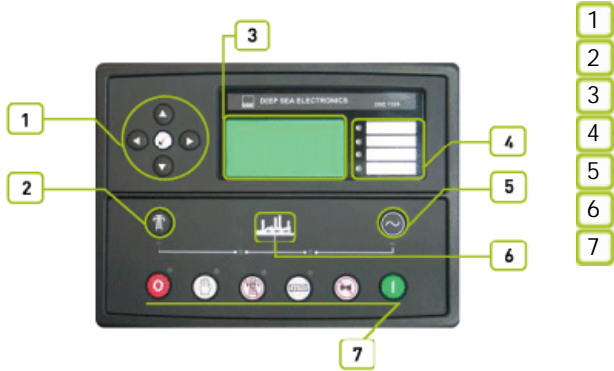

2

8G9ž +' &\$ž) 5ž&&\$#(\$

3


4

5

8G9+' &\$ž &&\$' ž "8G9+' &\$ž 8G9+' &\$ž ž " % &1 *(' žFG' &žFG(,) ž


AD 700

Doosan
Mecc Alte
D+ &

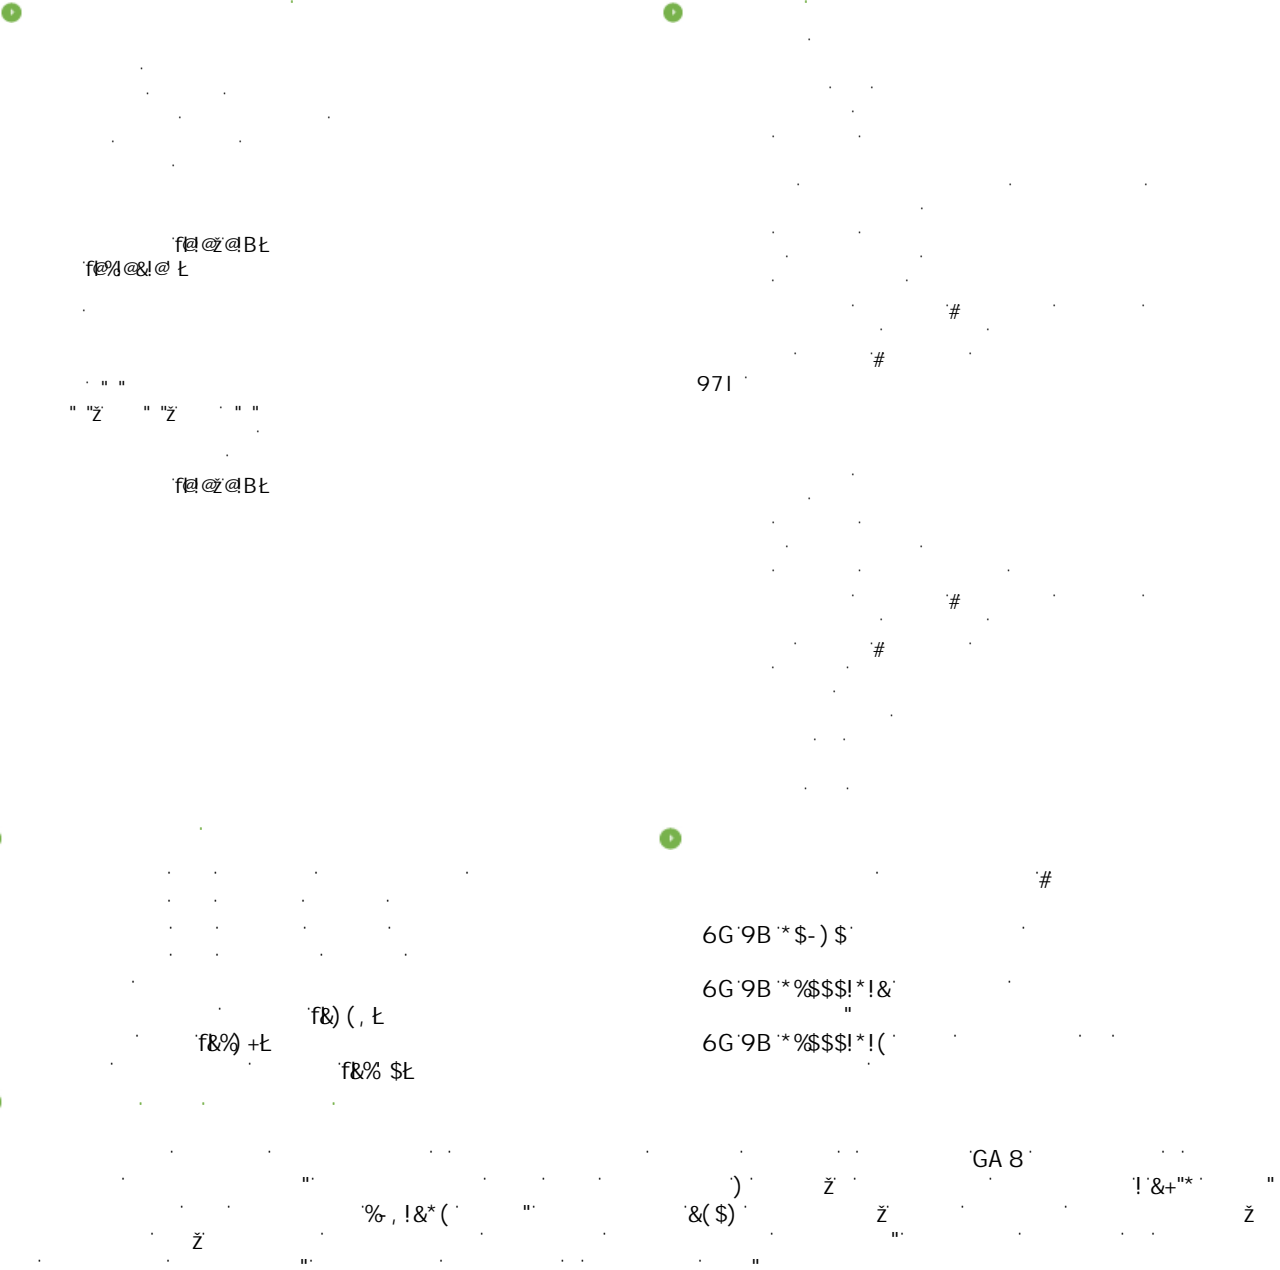

AD 700

Doosan
Mecc Alte
D+' &'

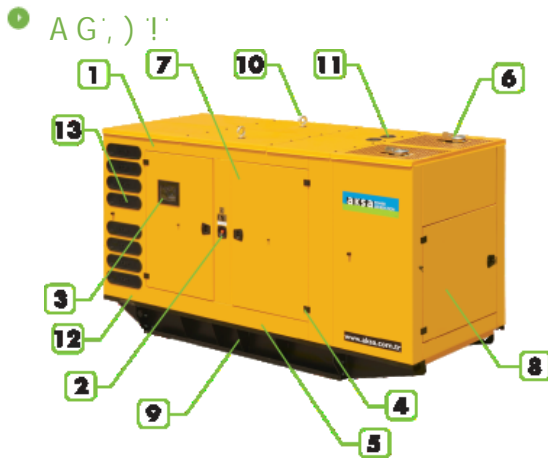

- 1 Steel structures.
- 2 Emergency stop push button.
- 3 Control panel is mounted on the baseframe . Located at the right side of the generator set.
- 4 Corrosion-resistant locks and hinges.
- 5 oil could be drained via valve and a hose
- 6 Exhaust system in the canopy.
- 7 special large access doors for easy maintenance
- 8 in front and back side special large access doors for easy maintenance
- 9 Base frame -fuel tank.
- 10 Lifting points similar to ISO container , located on each top corner of the canopy
- 11 the canopy provides easy access to radiator cap.
- 12 sound proofing materials
- 13 Plastic air intake pockets.

	"	1606
fl "L	"	5297
fl "L	"	2656
	L	1000